


Through Eave Meter Base Installation



Yazoo Valley EPA
"Strong on Service"

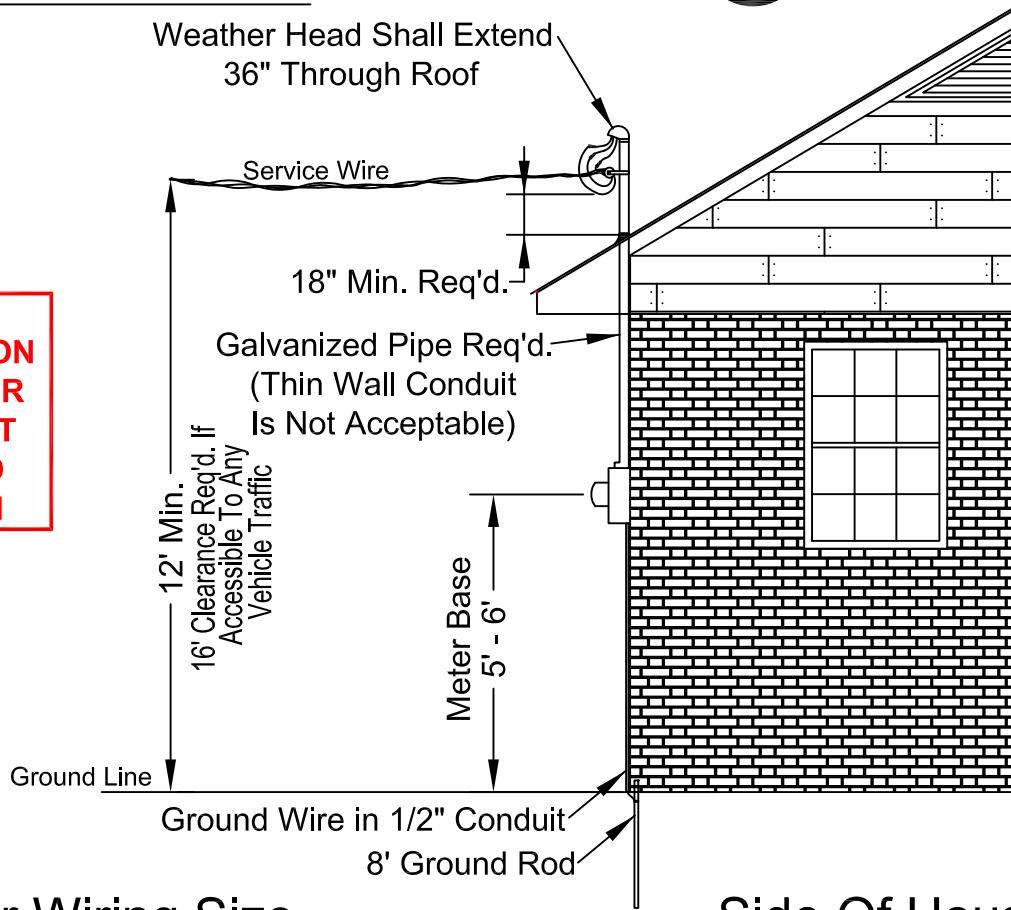


**\$75.00
REINSPECTION
FEE IF METER
BASE IS NOT
INSTALLED
AS SHOWN**

Customer Wiring Size

*****COPPER*****				
Meter Size	Conduit Size	Conductor Wire Size	Neutral Wire Size	Ground Wire Size
60 amp	1"	#4	#4	#6 Bare Copper
100 amp	2"	#2	#4	#6 Bare Copper
200 amp	2"	#2/0	#1/0	#6 Bare Copper
*****ALUMINUM*****				
Meter Size	Conduit Size	Conductor Wire Size	Neutral Wire Size	Ground Wire Size
60 amp	1"	#2	#4	#6 Bare Copper
100 amp	2"	#1/0	#2	#6 Bare Copper
200 amp	2"	#4/0	#2/0	#6 Bare Copper

Side Of House Meter Base Installation

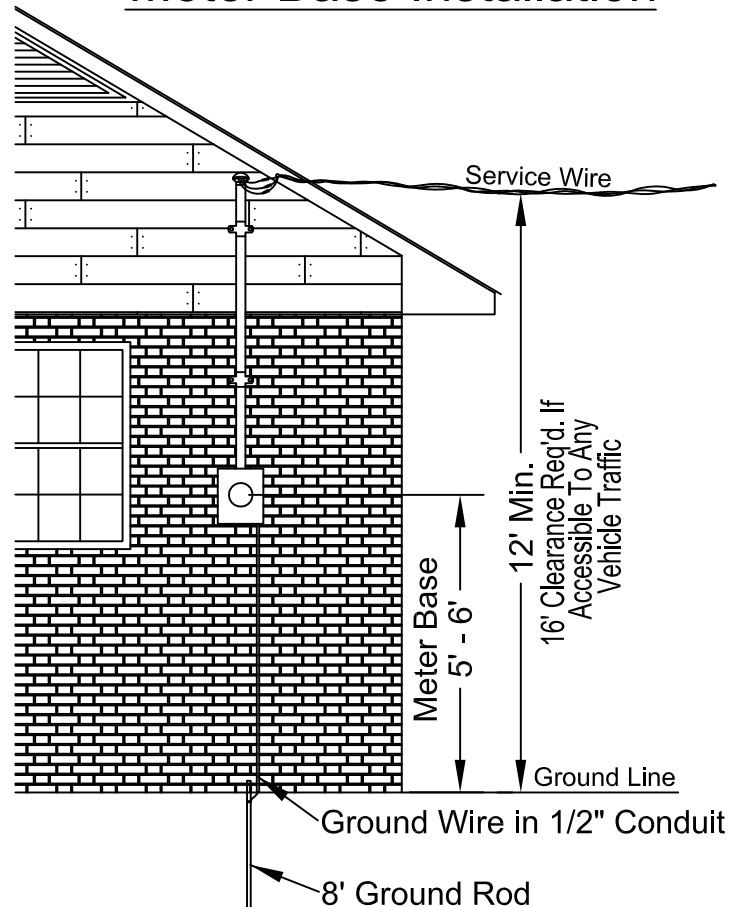

Yazoo Valley EPA	
Through Eave & Side Of House Meter Base Installation	
Approved by: MN	Date: 5/9/2016
Checked by: MN	Scale: None
Drawn by: MN	